

KOWA's BEST Selection

Special Sale

2020-2021
UNTIL APRIL 30, 2021

Disclaimer

- It may take time before certain products become available
- Color may not be true to the actual products due to the quality of printing.
- The products on this catalog may be changed without announcement

1 2 3 4 5 Roller Cabinet

KOWA's Cabinet Tool Set

New tool set that responds to many users' requests.



● Roller Cabinet

Caddy Size (including casters): W670 x H960 x D460 mm

Standard Accessories

KLK-27-157(B/R) Roller Cabinet and Tool Set (Red/Black)

- includes tools with urethane foam and **parts tray**
- Easy to store with 7 drawers
- (5 empty drawers, 2 with tool set)
- Selected 53 tools stored
- Stylish design with urethane foam



Each tray is equal to 3/3 size



Product Code	Product Name and Size
KLK-1790-80-182-83	Combination Wrenches 8, 10, 12, 14, 17 mm
KLK-9-12, 15, 17	Offset Wrenches 8x10, 12x14, 17x19 mm
KLK-18-5-8	Wooden Handled Penetration Screwdrivers Minus 100, 150 mm
KLK-18-9, 10, 11	Wooden Handled Penetration Screwdrivers Plus 176, 218, 283 mm
KLK-18-76	Wing Screwdriver Minus 200mm, Total Length 274 mm
KLK-18-85	Mini stubby screwdriver (interchangeable plus/minus type)
KLK-2-211, 213, 215, 217, 218, 220	Flat Power Standard Socket 3/8" 8, 10, 12, 14, 17, 19 mm
KLK-2-222, 224, 226, 228, 229	Flat Power Deep Socket Wrench 3/8" 8, 10, 12, 14, 17 mm
KLK-2-250, 252, 254, 256, 258, 260, 262	Torx Bit Socket 3/8" 8, 10, 12, 14, 17, 19 mm
KLK-2-3010M3804, 05, 06, 08	HEX BIT SOCKET 4.5, 5.8 mm
KLK-2-414, 16	Plug Wrench HEX 14, 16 mm
KLK-2-76	Universal Joint 3/8" 95.5 mm
KLK-2-763-3764	Extensions Bar 3/8" 95.5, 100, 250 mm
KLK-2-768N260	Spinner Handle 3/8" 95.5, 250 mm (Knurled Grip Type)
KLK-2-776	Quick Spinner 3/8" 95.5, 250 mm
KLK-2-753GB	Ratchet Handle 3/8" 95.5, 200 mm
KLK-5	Adjustable Wrench 300 mm
KLK-4-1	Nipper 150 mm
KLK-6-2	Radius Plier 150 mm
KLK-7-10	Water Pump Plier 250 mm
KLK-7-2	Combination Plier 200 mm
KLK-9-100	L-Type Ball Point Hex Wrench Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
KLK-17-3	Hard Hammer 1 pound
KLK-17-31	Plastic Hammer 1 pound
KLK-3P64K	Plastic Scraper Set 4pc
KLK-6-6	Magnet Trays 150

1 Roller Cabinet and Tool Set (Red/Black) KLK-27-157(R/B)

2 Roller Cabinet without Tool Set (Red/Black) KLK-27-W007(R/B)

● Transportation cost is charged separately.

● Option



3 Dedicated Handle (Red/Black) KL-27-HL(R) (B)



4 T-Type Wrench Holder (without Wrenches) KL-27-EA18



5 Top Mat KL-27-ACMAT01

Parts tray (standard accessory), dedicated handle and t-type wrench holder cannot be installed all together. Up to 2 items installed together.

6

7

8

9

Large Low-Platform Bike Lift

Large table (W800 x L2,250 mm) & Super low-platform
(min height from the ground: 115 mm)

BEST-selling bike lift!!



Slope Size:
W800 x L500 mm

Transportation costs, carrying-in and
installation costs, ground embedding
costs, etc. are charged separately.



you can
see the video

Air hydraulic type, air pressure:
6 0.8 to 1.0Mpa
KBK-50-LB100EN

Front wheel Clamp
(optional)

Remote Controller
Reel (optional)

■ Specification: VCT-1.25 x 4-cores
■ Cable length: 8 m
■ Rating: 30V, 6A
■ W300 x D335 x H105 mm



Electrohydraulic type remote controller
Air hydraulic unit



Electrohydraulic type:

7 200 VAC, electric type (single-phase)
KBK-50-LB200VN

Front Wheel Clamp

8 **KBK-50-LB100CL**

Remote Controller Reel

9 **KL-29-HCP804BL**

10 Medium Bike Lift (200V Electric Type)

Standard Type Lift (Table Size: W700 x L2,100 mm)
Unparalleled operability with 500/600/700/800 mm
4-stage lock mechanism



Transportation costs, carrying-in and
installation costs, ground embedding
costs, etc. are charged separately.

1200mm
900mm
700mm
600mm
300mm




KBK-50-200THI

Specifications

- Basic table size: 700W x L2,100 (500 mm: externally attached slope)
- Max. height from the ground: 1,000 mm
- Min. height from the ground: 160 mm
- Uploading Capability: 400 kg
- Lifting time: Approx. 20 sec
- Weight: Approx. 190 kg
- Motor: Electrohydraulic type, single-phase 200 V (built-in)
- Operation method: Wired remote controller
- Standard accessories: Front wheel stopper, wired remote controller (3 m), power cable (3 m), side rail

Optional: Front Wheel Clamp (Catalog No. 8)
Optional: Remote Control (Catalog No. 9)

11 Small Bike Lift (200V Electric Type)

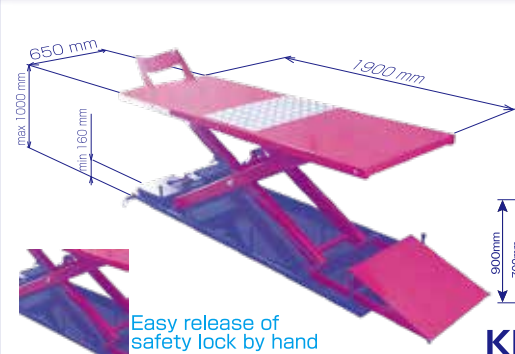

650 mm
1,900 mm
max 1,000 mm
min 160 mm

Slope plate automatically goes
under the table as the lift goes up

900mm
700mm
600mm
300mm



KBK-50-SM200V

Easy release of
safety lock by hand

**Compact model for small and
medium motorcycles!**

- Basic table size: W650 x L1,900 mm
- Min. height from the ground: 160 mm
- Electrohydraulic type with uploading capacity of 350 kg (motor unit built-in)
- Slope plate automatically goes under the table as the lift goes up

Optional: Front Wheel Clamp (Catalog No. 8)
Optional: Remote Control (Catalog No. 9)

Transportation costs, carrying-in and installation costs,
ground embedding costs, etc. are charged separately.

12 Oil Drainer for Motorcycle 25L

Are you tired of making a mess while draining oil waste?



Drain pan

- Min. height from the ground: 780 mm
- Max. height from the ground: 1,050 mm
- Tank Capacity: 25 L
- External Diameter: 300 mm
- Distance between closest wheels: 440 mm

KCK-7-25L

Using this product, you can operate oil change while placing motorbikes on bike lifts.
Drain pan that prevents splash / tank with capacity of max. 25L / air hydraulic draining functions
Clean, smart and efficient oil change is realized.
This product improves your service factory.

Drain pan specially designed to
be placed in the narrow space



Bulb releases pressure
inside the tank



The hook prevents oil
from dropping



You can visually see the
remaining oil level



13 Wireless Noise Catcher

KOWA developed a new noise catcher!!!

Have you experienced problems when you cannot find the source of the noise?

This new noise catcher solves your problems.

While old model required wires, WiFi connection enables the new model to go wireless.

All the data can be seen on the screen via software.


NEW



This product comes with 2 pieces of units.
Application included.

Specification

- Dimension (mm): W26 x D50 x H18 mm
- Weight of Main Unit: 25g
- Power Supply: Lithium-ion battery
- The number of connectable channels: 6 at maximum
- Run time on a full charge: Approx. 3 hours
- Accessory: USB Type C
- Protocol: WiFi (802.11g)
- Measurement distance: Within 10m
- Attachment method: Neodymium Magnet
- Applicable OS: Windows 10

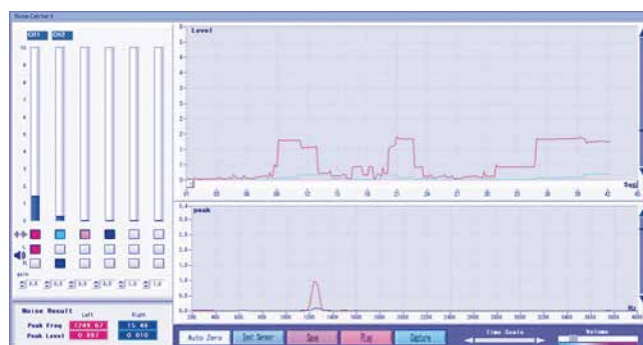

The detected data are displayed on the software screen:
Users can check the data in sound wave, play and share the saved data, which allows the deeper analysis.

KEK-7-2

14 Helmet Cleaner

Brand New!! Kowa Releases Long-Awaited Helmet Cleaner!!

This device sprays super alkali ion water into the helmet to clean inside of it, erase the smell and dirt inside.

*Super alkali ion water sold separately

NEW



Specification

- Size (mm): W300 x D450 x H364 mm
- Power Supply: AC 220V
- Mist: Super alkali ion water
- Operating Time: 1 min
- Mist Quantity: 6.7ml/min
- Total Tank Capacity: 1,900ml

KAK-3-HMC

You can clean your helmet easily.

15 Adjustable Dummy Suspension

By temporarily using this product as replacement of suspension, **NEW** you can move motorcycle.

The length of the product is adjustable by rotating nuts on the ends so this product can be used for small to large models.

- Effective length: 240 - 360 mm
- Diameter of attaching rings: 13 mm
- Thickness of the attaching points: 12.5 mm



2K-F-ADS0100

16 Spring Tool

Hot item returns after production halt **NEW**

You can use both ends.

Hammering with spring is possible in tight spaces, and long bolts can be loosened with ease. Especially useful for theft prevention screws used for main key and helmet holders.

Total Length: 132 mm



KL-18-32R

17 Micro Finish Full Set (with case)

Super fine double-ended diamond files! **NEW**

The straight flat shape allows processing deeper than conventional tapered design.



Product detail
Pin vise : Straight Tapered

KM-3-600SSET

18 19 Brake Piston Plier

Brake Piston Plier $\phi 26-36$ mm

Brake Piston Plier $\phi 16-28$ mm

Allows easy removal of piston at the maintenance of brake caliper
The thickness of the head parts were reduced from 9 mm to 6 mm.
This new models works well when working on fixed caliper of brake piston.

NEW



18 Brake Piston Plier $\phi 26-36$ mm
KFK-21-14

19 Brake Piston Plier $\phi 16-28$ mm
KFK-21-13

20 21 Rim Protector Set

Rim Protector Set (applicable rim range 8 - 10 inches)

Rim Protector Set (applicable rim range 16 - 23 inches)

This product protects colored wheels from being damaged when changing tires. You can protect wheel rim by attaching this product.

●Brand new: applicable rim range 8 - 10 inches

NEW



Rim Protector Set (applicable rim range 8 - 10 inches)
20 **KF-10-1004**

Rim Protector Set (applicable rim range 16 - 23 inches)
21 **KF-10-1002**

22 23 e-WASH 500 ml x 12 bottles / 2 liter x 2 bottles

Strong alkali ion water! Super Alkali ion water! **NEW**

For cleansing, sterilization, deodorization, anti oxidization, corrosion prevention. Environment friendly cleansing water.

e-WASH is cleansing alkali ion water that promotes health and safety. Very effective from personal to professional use, e-WASH does not include any harmful substances such as surface active agent and chemicals.



1
Surface penetration
Super alkali ion water quickly penetrates the dirt on the surface.



2
Separation and dispersal
Minus ion separates the dirt from the surface and disperses it.



3
Emulsification and encapsulation
Greasy dirt surrounded by minus ion gets smaller and emulsified.



4
Soaping
After the previous steps, soaping process takes place and cleansing goes on.



22 500ml-12bottles
KA-3-EW120007

23 2l-2bottles
KA-3-EW120010

24 Oil Pan Stand

Works great when storing oil pans. You can stand 4 oil pans to let oil go down through the drain. Compact size which does not occupy large space.



■W 400mm
■D 370mm
■H 620mm

●Oil pans sold separately

KC-51-1

25~30 Universal Wrench

NEW

T-type universal box wrench with a compact head, which allows you to work in limited space. Universal wrench with detachable handle.

This tool can stick bolt with magnet inside



Magnet



You can use this item with handle with 3/8 SQ insertion angle

■Total length: 600 mm
■Insertion angle: 3/8 SQ

25 270mm 8mm
KLK-4-UNV08S

26 270mm 10mm
KLK-4-UNV10S

27 270mm 12mm
KLK-4-UNV12S


28 600mm 8mm
KLK-4-UNV08L

29 600mm 10mm
KLK-4-UNV10L

30 600mm 12mm
KLK-4-UNV12L

31 Sliding Ratchet Handle

You do not have to attach sliding handle and ratchet adapter everytime you use because they are unified. Efficiency of T-type wrench and convenience of ratchet handle are combined. You can slide the handle, which allows this product to be used as t-type wrench and ratchet handle.

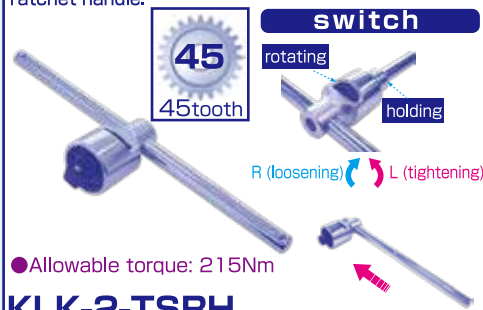

●Allowable torque: 215Nm

KLK-2-TSRH

32 Fork Spring Compressor

Upgraded! Must-have item when disassembling front forks.

No jack needed

You can disassemble/assemble front forks all by yourself using this stand. This new item allows you to do all the work without jacks.




Used together with special service tool (sold separately)



Easy compression using ratchet wrench

Adjustable height range: 690 - 900 mm




2K-F-20

33 Chain Adjuster Wrench

Tool designed to adjust chain tightness of pro-arm

You can adjust drive chain without using manufacturer's genuine tool

●Applicable model: CB1000R and VFR800F etc.

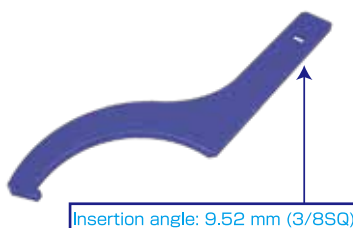

Insertion angle: 9.52 mm (3/8SQ)



Please use this product with spinner handle 3/8 SQ (sold separately)

2K-L-CAW124

34 UV Bondy Starter Kit

Repair, mend and mold, all in one! Plastic hardens under UV in 4 sec. Large volume of 10 ml, which is about twice the volume of similar products

You can apply UV Bondy to a variety of automobile parts such as plastic, metal, gum elastic, wires, PVC, polypropylene, bark, wood, stone and brick. This product can be used to repair and mold material for many purposes.

UV Bondy is the form of liquid until it is hardened. It does not dry out as most of the other products do.

NEW



KP-2-UVBONDY

35 Mecha Mate V

In addition to current, resistance and other electrical component-related basic measurements, Mecha Mate VI can measure the engine speed.

- Size: 48 x 180 x 30 mm / Weight 220 g
- Measurable Engines: 2 cycle engines, 4 cycle engines
- Power Source: 1.5V size AAA battery x2
- Storable temperature / Humidity: 0 to 40°C 80%RH
- Power consumption: 1mA (approximately 3mV)



KEK-8-241P

36 Brake Bleeder

Negative pressure brake breeder. Efficient work with easy operation. This item allows you to change brake oil with ease.

NEW



Capacity: 1,000 ml

KF-21-KOP110

37 Digital Vacuum Gauge for 4 Cylinders

A simple and easy-to-view LCD allows negative pressure to be measured with a rubber hose from the bottom of the gauge body. It comes equipped with a strap that allows it to be hung anywhere.

*Attachments for measurement are sold separately.

- Size: 170 x 90 x 30 mm
- Measurement range: 40KPa to 80KPa (negative pressure)
- Power supply: 12 VDC



KEK-55-64

38 Inspection mirror (with light)

Useful to light the dark, narrow space with bright LED light reflected by a mirror

- Brightness: 30,000 mcd
- Length of antenna: 585 mm
- Weight: 73g
- Material: Brass, glass and ABS
- Power Supply: Alkaline battery (LR44 x 3)
- Size of the oval part: 50 x 80 mm

NEW



KL-33-74157

39 Pick Tool Set

Works great at picking up tiny parts such as o-rings. 4 kinds of tips (picking parts) can be inserted into the grip.

- Length of the grip: 127 mm
- Weight: 70g



KL-9-LB607

40 CO/HC Tester Attachment

Must-have item used together with CO/HC Tester **NEW**

Shapes of motorcycle mufflers vary depending on its function and design. Thus, it is usually difficult to insert sampling probe 600mm inside the muffler when testing the density of CO and HC in exhaust gas. You can attach this item as an extension part to the motorcycle to perform the task easily. By modifying the shape of silicon rubber, this item can be used for more models.

- Diameter of silicon rubber: 85 mm
- Length: 655 mm
- Weight: 350 g

Usage example



2K-N-05A


41 CO/HC Tester Attachment Stand

42

CO/HC Tester Attachment Stand Adapter

The brand new stand that holds CO/HC tester attachment into the muffler. You can operate the task all by yourself by using this attachment stand.

NEW



CO/HC Tester Attachment Stand

Usage example



Adapter


41 CO/HC Tester Attachment Stand
2K-N-06

42 CO/HC Tester Attachment Stand Adapter
2K-N-06ADP

43 Plug Wrench Set (New Type)

New type applicable to the compact spark plugs compared to KOWA's conventional plug wrench set KLK-2-403A. This set includes new 2 plug wrenches (14mm and 16mm) along with 2 hex extension from the conventional model.

■ Insertion angle: 9.52 mm (3/8 SQ)

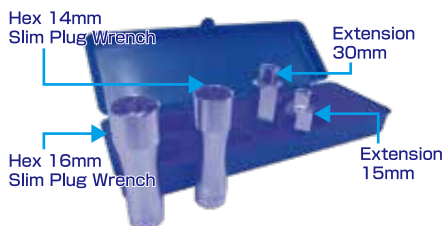

KLK-2-410

44 Universal Plug Wrench 14 mm

Hex 14mm plug wrench, which has been popular nowadays. This universal deep type allows easy insertion into plug hole. Plug catch spring inside socket helps easier plug-in and plug-out.

■ Insertion angle: 9.52 mm (3/8 SQ)



Inserted into the plug hole
Extension bar is sold separately

KLK-2-NP402

45 Universal Plug Wrench 16 mm Set

Concerns over coming free of sockets have been eliminated by employing a push-cancel type extension bar.

For C plugs, insert lightly and swing 15°.

■ Plug wrench with universal: 16mm

■ Extension bars: 75mm, 125mm, one of each

■ Insertion angle: 9.52 mm (3/8 SQ)



KLK-2-NP400

46 Stand Spring Setter

Tool used when replacing stand springs of motorcycles. New springs can be fitted easily by applying the principle of leverage.

■ Total length: 180 mm
■ Shaft length: 100 mm



KL-9-C141

47 Bike Glide Body

360 degree rotatable / Works great in limited space

NEW

■ Diameter: 31 cm
■ Allowable load: 500 kg
■ Material: PVC, PA
■ Height: 40 mm




KB-5-M889

48 Maintenance Roller for Motorcycle

You can operate the below considerably faster: maintenance of chain, wheel cleaning and repairing flat tires

■ Size: 230W x 305L x 42H mm
■ Weight: 1.6 kg
■ Allowable weight: 200 kg
■ Material: Steel, aluminum

NEW



● Make sure to use this product with front wheel vice

KB-5-36BMR

49 With Fuel Pressure Indicator Attachment Set

Compatible with quick connectors used with fuel lines. This measuring instrument is indispensable for fuel pressure measurement.

These φ6 and φ8 attachments are compatible with almost all Honda vehicles. Short shaped, which is easy to use for motorcycles.



2K-E-H000

50 Fork Bolt Socket 24 mm Hex

Made of plastic to protect aluminum fork bolts

Used for CB1300SF

■ Maximum torque: 50Nm
■ Insertion angle: 12.7 mm (1/2 SQ)
■ Bolt Width: Hex 24 mm



2K-L-FB24

51 52 Fork Bolt Socket 45 mm Octagonal

Made of plastic to protect aluminum fork bolts

■ Maximum torque: 50Nm or less
■ Insertion angle: 12.7 mm (1/2 SQ)
■ 2K-L-FBW003: Octagonal Bolt Width 41 mm
■ 2K-L-FBW001: Octagonal Bolt Width 45 mm



51 41mm
2K-L-FBW003
52 45mm
2K-L-FBW001

53~60 Hex Bit Socket 1/2 SQ for Axle Shaft



A large hex bit socket suitable for front axle shaft of motorcycles.

■ Insertion angle: 12.7 mm (1/2 SQ)



55 19mm
KL-2-4012M4319

58 22mm
KL-2-4012M4322

56 20mm
KL-2-4012M4320

59 24mm
KL-2-4012M4324

53 14mm
KL-2-4012M4314

54 17mm
KL-2-4012M4317

57 21mm
KL-2-4012M4321

60 27mm
KL-2-4012M4327

61 Mecha Mate VI

Easy! Contact pickup antenna end to the spark plug cable or the spark plug cap to get the readings. Compact device which measures engine rotation speed.

- Size: 36 x 130 x 15 mm / Weight 60 g (including batteries)
- Measurable Engines: 2 cycle engines, 4 cycle engines
- Power Source: 2 "AAA" batteries
- Usable temperature: 0 to 40°C 80%RH
- Storable temperature: -20 to 60°C 70%RH
- Power consumption: 1mA (approximately 3mV)



KEK-8-6

62 Mecha Mate VII

Definitive comprehensive diagnostic tester / support for all kinds of electric checks

- DC voltage: 60.0mV to 1000 V
- DC current: 600uA to 10.00A
*10A can be measured within 30 seconds
- Resistance: 600.00 to 60.00MΩ
- Rotation speed: 240 to 20,000 rpm
*Value for 4 cycles when using rotation sensor
- Dwell angle: 0.0° to 360.0°
- Size & Weight: 161H x 80W x 50D mm, 340g
- Accessories: test leads, rotation sensors, temperature probe, spare fuse, etc.
- Battery voltage measurement
- Alternator charging current measurement
- Rotation speed measurement
- Injection pulse with measurement
- Air conditioner outlet temperature measurement
- Measurement of all sensors



KEK-32-16S

63 Digital Tester

**Top Quality
Usable together with
peak
voltage adapter**


**Multi-function and
low cost realized**

- DC voltage: 400mV to 600V
 - AC voltage: 400mV to 600V
 - DC current: 40mA to 10A
 - AC current: 40mA to 10A
 - Resistance: 400Ω to Open
 - Frequencies: 9.999Hz to 9.999MHz
 - Weight: 180g
 - Size: 155 x 75 x 29 mm
- DCV: 600V, ACV: 600V,
DCA: 10A, ACA: 10A, Ω: 40MΩ



KE-32-KU2600E

64 65 66 Optional Parts for Digital Multi-Tester



Alligator Clip (Extra Large)
Inserted into the end of test lead
(Total length: approximately 200 mm)



Alligator Clip (Large)
Inserted into the end of test lead
(Total length: approximately 70 mm)



Thin Pin Adapter
Connected to the end of test lead.
Pin (probe) is shape memory type: φ0.7mm

**65 Alligator Clip (Large)
KE-32-CL13A**

**64 Alligator Clip (Extra Large)
KE-32-CLDG3A**

**66 Thin Pin Adapter
KE-32-TLA7M2**

67 Peak Voltage Adapter

Used to measure motorcycle ignition system (ignition coil, pulse generator, CDI unit. Etc.) output.



KEK-54-9-B

68 Stacking Test Probe

Sharp and compact probe. The fine, needle-like tip fits into gaps between wiring couplers, and can be connected to your tester.

- 1 each of red/black probe wires
- 2 straight probe tips
- 2 bent probe tips
- Clip type earth



KEK-32-20A

69 Tire Gauge with Chuck for Motorcycles



Large, easy to see

- Measurement range: 50 to 500kPa
- Meter Size: φ80 mm
- Chuck for motorcycles

KFK-2-24

70 Compression Gauge Set

Components parts: flexible attachment 8 mm, 10 mm, 12 mm, 14 mm
Measurement range: 0 to 2,500kPa



KEK-20-100

71 72 73 74 Compression Gauge ATT

Compression gauge attachment applicable to newly designed plugs

Use KEK-20-100 (OSSCAKEK20100) or KEK-20-5FG (OSSCAKEK205FG) for meters.



KEK-20-111EHA M8x1.0 L=19mm



KEK-20-112EH M10x1.0 L=19mm



KEK-20-112LR M10x1.0 L=26.5mm



KEK-20-112SC M10x1.0 L=12.7mm

**71 For M8EH plugs
KEK-20-111EHA**

**73 For long reach plugs
KEK-20-112LR**

**72 For M10EH plugs
KEK-20-112EH**

**74 For M10 plugs
KEK-20-112SC**

For maintenance of Honda PCX Hybrid and Electric Vehicles

Due to the rapid adoption of HEVs (hybrid vehicles), KOWA provides insulator tools.
KOWA's insulators protect workers from being electrocuted when operating live wire work.

Parts list of KLIN-27-SEL2

1	Ratchet Wrench
2	Torque Wrench
3	T-handle 3/8 SQ
4	Socket Wrench 8 mm
5	Socket Wrench 10 mm
6	Socket Wrench 12 mm
7	Long Socket 10 mm
8	Screwdriver plus No.2
9	Screwdriver minus 100
10	Extension bar 50 mm
11	Extension bar 100 mm
12	Pick-up tool
13	Voltage Tester (AC400V / 600V / DC600V)
14	Insulated Gloves (DC750V, AC300V)
15	Dedicated case (Size: L460 x W345 x H105 mm)




Insulator Tools for Motorcycles

- Acquired certification: EN60900
- Sharp looking tools with "ultra thin insulating coating"
- Double layered insulating coating with different colors (yellow on the outside, red on the inside)
- Top quality that covers following: petrol resistance, resistant to engine, heat, coldness and climate



Insulated Glove(L)



Insulated Cover
500 x 500 x t3



you can
see the video

75 Insulator Tools for Motorcycles KLIN-27-SEL2

76 Insulated Gloves for Motorcycles 2K-P-11

77 Insulated Covers for Motorcycles 2K-P-50

78 Swing Arm PulleyII

Stronger than the previous model

This item helps you disassemble swing arm from final gear shaft (applicable models: Honda PCX 125/150). Works great when bearings and final gear shafts are stuck so hard to disassemble. The strength of this new type is considerably higher than the previous model.



Great arm strength realized

Modified so as for bolt to be directly
attached to swing arm.



2K-L-SAP0200

79 Eliiy Power Lithium Ion Battery Charger

The only lithium ion battery charger for Honda models

Honda's genuine battery charger. The best charging method helps the battery reach its full potential. The palm-sized super compact design makes it easy to carry around. Plug it into the outlet using with the adapter, the battery charging starts automatically. Easy to check the remaining battery level with 2 different brightness system



KF-15-C1401B

80 Tap Die Set

Set contents Taps and dies

- 3 x 0.5 / 4 x 0.7 / 5 x 0.8 / 6 x 1.0 / 8 x 1.25 / 10 x 1.25 / 10 x 1.5 / 12 x 1.25 / 12 x 1.5

Tap wrench and die handle, one each



KM-2-M20B

81 Timing Light

Power Source: AA batteries x4
Sensor: Clamping method on the
1st cylinder plug cord /
Cord length 1m

- Size: W50 x W242 x H44 mm
- Weight: Approximately 360 g (including batteries)



KE-50-FL500N

82 83 Tiger Grip Nitrile Gloves



82 Qty: 100 (Medium)
KP-13-TG1-M

83 Qty: 100 (Large)
KP-13-TG1-L



KOWA SEIKI CO., LTD.

<https://www.kowa-seiki.co.jp/>

